

Accord



Share ideas creatively with a thoughtfully designed, high-performance combination board.

Introduction

Discover the convenience of Accord - a frameless, mixed-media collaborative board combining the durable dry erase surface of CeramicSteel with a sound-absorbing tackboard. Offering a wide selection of sizes and material combinations, there is no longer a need to choose which surface suits your space best.





Hygienic Surface

CeramicSteel is a nonporous surface that is naturally resistant to bacteria and viruses. Coils, sheets, and panels with type U finish are also available in Polyvision's Hygienic CeramicSteel — a proprietary finish that incorporates an additive of silver micro particles formulated to create a self-sanitizing surface.

Sustainable

Polyvision's e³ CeramicSteel is Cradle to Cradle Certified™ Silver, highlighting the sustainable manufacturing process of the product. CeramicSteel is also 99.9% recyclable. CeramicSteel is also certified by SCS Global Services as Indoor Advantage Gold™, meeting strict indoor air quality (IAQ) chemical emission limits for volatile organic compounds (VOCs).

Customizable

CeramicSteel type H and U can be customized to support specific sheet sizes, custom colors and digital printing. Incorporate our material into your whiteboard design for premium aesthetics and functionality.

CeramicSteel Features and Benefits

- Smooth, inert surface
- Made from inorganic materials
- Magnetic
- Colorfast, will never fade
- Resistant to bacteria, graffiti, fire, scratches, stains, and chemicals
- Easy to clean
- Releases zero VOCs




The ability to incorporate your brand elements in durable, lasting CeramicSteel can be achieved with Polyvision Studio.



Accord Options

Time-tested CeramicSteel

Always-reliable, best-in-class CeramicSteel dry erase surface is available in crisp Arctic White finish. Choose a painted edge treatment in white matching the CeramicSteel surface or an accented color matching the sound-absorbing material.



Arctic White 6111U


Pantone Match 11-4800 TPG

Sound-absorbing Tackboard

Felt panels complete Accord with sound absorption, a tackable surface, and a selection of six colors for a pop of color and dimension.




Stone

Finish Code PV39
 Pantone Match Cool Gray 6
 RAL Match 7030
 CeramicSteel Edge Color  Platinum edge





Dusk

Finish Code PV40
 Pantone Match Cool Gray 7
 RAL Match 7037
 CeramicSteel Edge Color  Truffle edge




Storm

Finish Code PV41
 Pantone Match 5425
 RAL Match 7001
 CeramicSteel Edge Color  Lagoon edge





Space

Finish Code PV42
 Pantone Match 296
 RAL Match 5001
 CeramicSteel Edge Color  Baltic edge




Aqua

Finish Code PV43
 Pantone Match 5473
 RAL Match 6004
 CeramicSteel Edge Color  Peacock edge




Arbor

Finish Code PV44
 Pantone Match -
 RAL Match -
 CeramicSteel Edge Color  White edge

Standard Sizes


Horizontal Panel

Dimensions (W x H)	CeramicSteel Panel Dimensions (W)	Left OR Right / Double	Weight	Legend
1780 mm x 1185 mm 70" x 47"	1185 mm 47"	Left OR Right	21.8kg / 48.1 lbs	1
2425 mm x 1185 mm 94" x 47"	1830 mm 72"	Left OR Right	32.5kg / 71.1 lbs	2
3015 mm x 1185 mm 119" x 47"	2420 mm 95"	Left OR Right	42.2kg / 93 lbs	3
2420 mm x 1185 mm 95" x 47"	1185 mm 47"	Double	23.9kg / 52.7 lbs	4
3220 mm x 1185 mm 119" x 47"	1830 mm 72"	Double	34.6kg / 76.3 lbs	5
3610 mm x 1185 mm 142" x 47"	2420 mm 95"	Double	44.3kg / 97.7 lbs	6

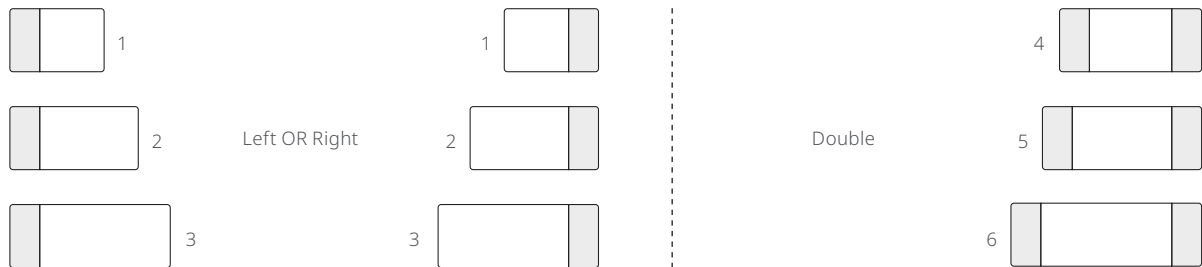

Vertical Panel

Dimensions (W x H)	CeramicSteel Panel Dimensions (W)	Left OR Right / Double	Weight	Legend
1780 mm x 1830 mm 70" x 72"	1185 mm 47"	Left OR Right	33.7kg / 74.3 lbs	7
2375 mm x 1830 mm 94" x 72"	1185 mm 47"	Left OR Right	37kg / 81.6 lbs	8
1780 mm x 2420 mm 70" x 95"	1185 mm 47"	Double	44.4kg / 97.9 lbs	9
2375 mm x 2420 mm 94" x 95"	1185 mm 47"	Double	48.7kg / 107.4 lbs	10

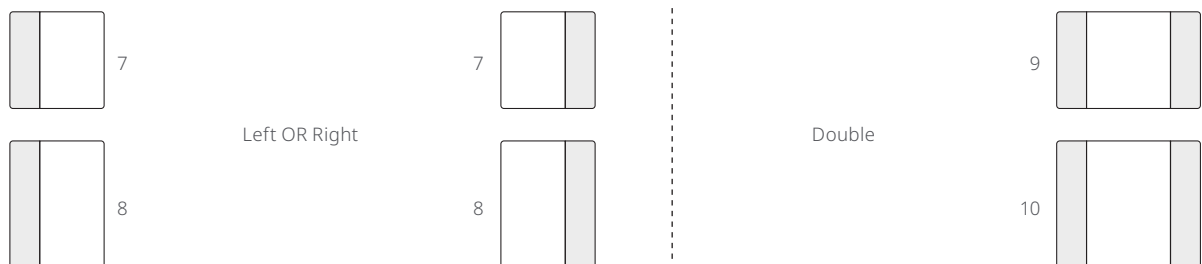

Corporate Responsibility

Polyvision believes that sustainability is an important business practice in today's global economy. In line with this belief, we strive for continuous improvement in all areas of environmental stewardship — responsible use of raw materials and natural resources, manufacturing processes and operation of all facilities — to reduce the impact of our activities on the environment. In the end, we believe we are all in this together, working to protect and cultivate the world we live in to make more sustainable choices.



Manufacturing Excellence

All Polyvision facilities are compliant with international standards and certified for Quality, Environment, Health and Safety. Our environmental goals aim to reduce and manage our global environment footprint in the areas of VOC emission, water use, waste output and CO₂ emission.



- ISO 9001 Quality Management Systems Certification
- ISO 45001 Occupational Health & Safety Management Certification



Ensuring A Sustainable Future

In addition to safe and sustainable manufacturing processes, Polyvision holds our products to the highest standards. We are third-party certified for our CeramicSteel surface by:



- Cradle to Cradle Certified — releases no harmful chemicals into the environment, safeguards clean water, materials are safe for humans and the environment
- Indoor Air Quality Certified to SCS.EC10.3-2014 v4.0
- ISO 14001 Environmental Management Certification



Warranty Protection

Interior panels utilize the CeramicSteel which offers one of the industry's most comprehensive warranty with lifetime surface warranty for interior applications. Panel performance is subject to the panel & substrate material warranty.

CeramicSteel Surface

Forever warranty Polyvision warrants that all porcelain-enameled surfaces and/or products made with CeramicSteel (Premium Writing Surfaces) or CeramicSteel (Collaborative Products) will retain its writing and erasing qualities and maintain its gloss variance and color consistency for the life of the building or for as long as the product is in use, whichever comes first.

Panel Construction

10 year limited warranty Polyvision warrants that our panels, under normal atmospheric conditions and when sealed from moisture, will not delaminate from the substrate or warp for a period of 10 years.

International Sales & Fulfillment

For more information and orders, please contact the regional team closest to you.

Americas

info@polyvision.com | 1.678.542.3100

Europe, Middle East + Africa

EMEAsupport@polyvision.com | +32.89.32.31.30

Asia Pacific

APACsupport@polyvision.com | +852.2520.0160



Polyvision Americas

4301 N Wood DR
Okmulgee, OK 74447 USA

T 1 888 325 6351
E info@polyvision.com

Polyvision Europe

Zuiderring 56
3600 Genk, Belgium

T +32 89 32 31 30
E EMEAsupport@polyvision.com

Polyvision Asia-Pacific

15th Floor, Kinwick Centre
32 Hollywood Road, Central District, Hong Kong

T +852 2520 0160
E APACsupport@polyvision.com



SURFACEMATTERS™

©2024 Polyvision Corporation. All rights reserved. Trademarks used herein are the property of Polyvision Corporation or of their respective owner. Polyvision Corporation reserves the right to make changes in product design, construction or detail, and to discontinue any product or material without notice.

polyvision.com



04-29-2024 EMEA APAC